

PRODUCT SHOWCASE

GEOHERMAL VerticaLOOP™ FUSED WITH GEO-GLIDE U-POINT

GEO-GLIDE U-POINT

1. The narrowest u bend on the market. The OD is no wider than 2 pipes side-by-side, allowing the installer to save on labor, drilling, and material costs.
2. The flow path is 7-10 times larger than existing U-Bends, eliminating the risk of debris obstructing the flow area.
3. All U-Point fittings are manufactured and tested to Standard ASTM D3261.
4. All U-Point fittings are rated DR9.



Certified for
Geothermal
Application

PROGRESSIVE BANDING
Loop is Strapped Every 2
Layers of Pipe for
Controlled Insertion.


UNICOILED
Both Pipes are Wound
Simultaneously to Form
One Big Coil.

40PSI Pressurized Loops
Re-Tested and Signed
Before Shipping.

VERSAPIPE HD
High Efficiency Process to
Create the Easiest Pipe
to Drop in Boreholes.

OUTSIDE DIAMETER COMPARISON

Diameter	Other Ubends	U-POINT	Reduction vs Others
¾"	2.375" – 3.125"	2.100"	Up to 33%
1"	3.120" – 3.750"	2.630"	Up to 30%
1-¼"	3.750" – 4.625"	3.320"	Up to 28%

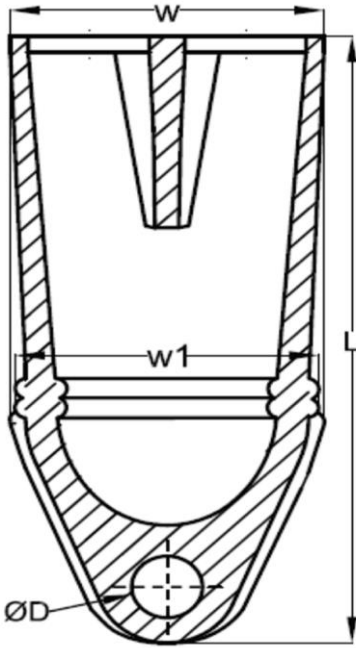

DIMENSIONS TABLE

Nominal Diameter	Assembled U-Point Dimensions				Maximum Loop Depth*
	D	W	W1	L	
¾"	0.593"	2.100"	2.050"	5.040"	3,000 ft.
1"	0.593"	2.630"	2.520"	6.260"	2,500 ft.
1-¼"	0.593"	3.320"	3.230"	7.150"	2,000 ft.

*Estimated. Ask your Versaprofiles account manager for special requests.
 *Loops cut-to-length special orders are available at every 5 feet.

EXCLUSIVE SIZE

1-½" loops up to 1,500 ft.



MORE PACKAGING OPTIONS




STICKS

Standard Lengths	Resins	Diameters
20, 40 and 50 feet	PE3608 & PE4710	<ul style="list-style-type: none"> ¾" to 8" IPS SDR9 to SDR26 80 PSI to 250 PSI

TITAN™ REEL

Resins	Diameters
PE3608 & PE4710	<ul style="list-style-type: none"> ¾" to 2" IPS SDR9 to SDR26 80 PSI to 250 PSI
Standard Lengths Available	
Nominal Diameter (in)	Length (ft)
¾	15,000
1	12,000
1-¼	7,000
1-½	5,500
2	3,500

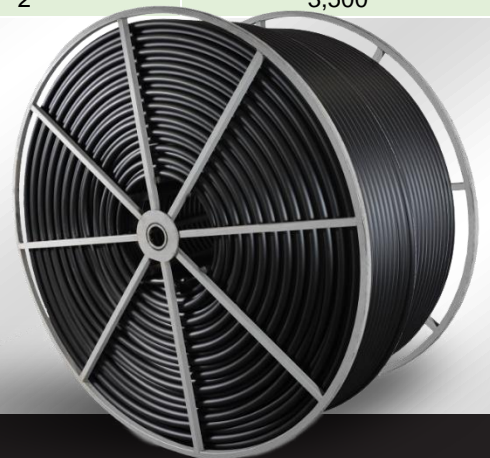

CONTACT US → info@versaprofiles.com 1 877 335 7473